



8,4-26m





8,2m



27kN


### Hakenflaschen

Traglast	Rollen	Strangzahl	Gewicht	Höhe
18 t	3	7	120 kg	950 mm
2,8 t	-	1	60 kg	500 mm

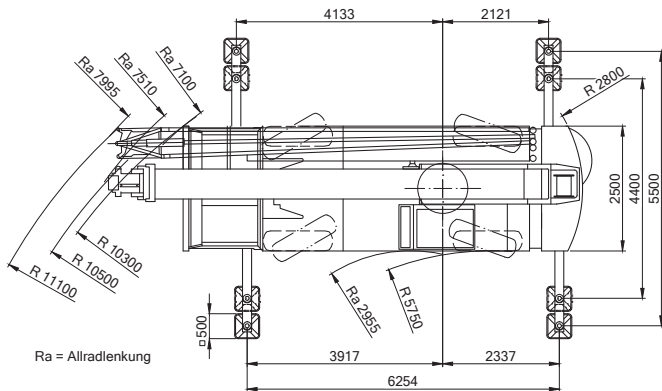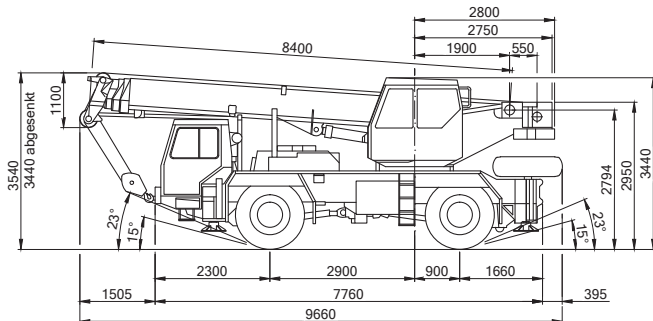



## Arbeitsbereiche mit Klappspitze

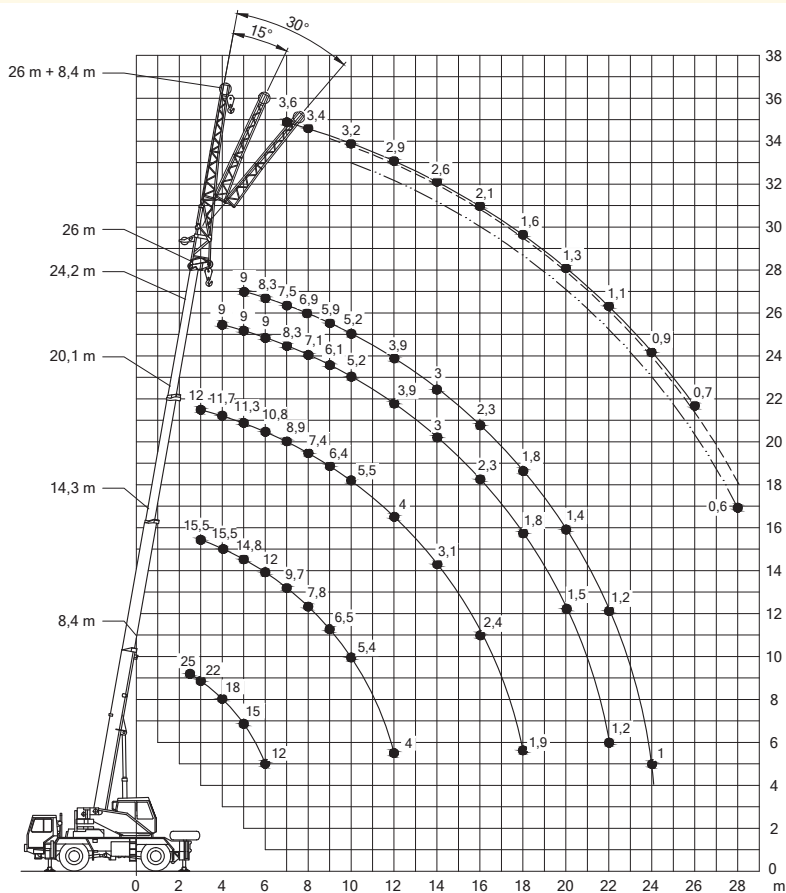



8,4-26m



6,25x5,6m



3,3t



360°

**75%**

m	8,4	14,3	20,1	24,2	26	m
2,5	30					2,5
2,8	25					2,8
3	22	15,5	12			3
3,5	20	15,5	11,9			3,5
4	18	15,5	11,7	9		4
4,5	16,5	15,5	11,5	9		4,5
5	15	14,8	11,3	9	9	5
6	12	12	10,8	9	8,3	6
7		9,7	8,9	8,3	7,5	7
8		7,8	7,4	7,1	6,9	8
9		6,5	6,4	6,1	5,9	9
10		5,4	5,5	5,2	5,2	10
12		4	4	3,9	3,9	12
14			3,1	3	3	14
16			2,4	2,3	2,3	16
18			1,9	1,8	1,8	18
20				1,5	1,4	20
22				1,2	1,2	22
24					1	24



8,4-26m



6,25x4,4m



3,3t



360°

**75%**

m	8,4	14,3	20,1	24,2	26	m
2,5	23,5					2,5
3	20,9	15,5	12			3
3,5	18,7	15,5	11,9			3,5
4	17	15,5	11,7	9		4
4,5	15,4	13,2	11,5	9		4,5
5	13,3	11,4	10	9	9	5
6	9,4	8,8	7,9	7,4	7,2	6
7		7,1	6,4	6,1	5,9	7
8		5,8	5,4	5,1	5	8
9		4,7	4,5	4,3	4,2	9
10		3,9	3,8	3,7	3,6	10
12		2,8	2,8	2,6	2,6	12
14			2	1,9	1,9	14
16			1,5	1,5	1,4	16
18			1,2	1,1	1,1	18
20				0,9	0,8	20
22				0,7	0,6	22



8,4-14,3m



freistehend



3,3t



0°

75%

m	8,4	14,3	m
2,5	13,5		2,5
3	12,3	10	3
3,5	10,3	8,8	3,5
4	8,4	7,6	4
4,5	7	6,7	4,5
5	6	5,9	5
6	4,5	4,7	6
7		3,7	7
8		3	8
9		2,4	9
10		2	10
12		1,4	12



8,4-26m



8,2m



6,25x5,6m



3,3t



360°

75%

m	24,2			26			m
	0°	15°	30°	0°	15°	30°	
7	4,1			3,6			7
8	4			3,4			8
9	3,9	3		3,2	2,5		9
10	3,8	2,8	2,3	3,2	2,4	1,9	10
12	3,5	2,6	2,2	2,9	2,2	1,9	12
14	2,8	2,5	2,1	2,6	2,1	1,8	14
16	2,1	2,2	2	2,1	2	1,7	16
18	1,7	1,8	1,9	1,6	1,8	1,7	18
20	1,4	1,5	1,5	1,3	1,4	1,5	20
22	1,1	1,2	1,2	1,1	1,1	1,2	22
24	0,9	1	1	0,9	0,9	1	24
26	0,8	0,8	0,8	0,7	0,8	0,8	26
28	0,6	0,7	0,7		0,6	0,6	28